



DESIGNED TO HEAT.
BUILT TO LAST.

WOOD

FIREPLACE INSERTS





THE CABELLO

The Cabello is the newest edition to our line-up of wood burning fireplace inserts. Like the Boston, the exterior of the Cabello is made from traditional cast iron, detailed with reliefs and curves designed by our craftsmen. Unique to the Cabello, it's flush face design allows it to protrude a mere two inches from your existing masonry.

Design Features

- Flush Face Design
- Cast Iron Exterior
- Chrome Plated Latch with Wooden Handle
- 1200 or 1700 Firebox
- Limited Lifetime Warranty
- Glass Size: 177 in²
- Optional Hearth Shelf
- Optional Oversize Surround

Fireplace Details

| Model Designation | 1200 | 1700 |
|------------------------|-----------------------|-----------------------|
| BTU Maximum Input | 67,000 BTU | 74,000 BTU |
| Heating Area | 2,200 ff ² | 3,000 ff ² |
| Efficiency | 82.6% | 84.7% |
| Burn Times | 6-10 Hours | 8-12 Hours |
| Maximum Log Size | 18 in. | 20 in. |
| Min. 1200 Install Dims | 32"w 18½"d 19¼"h | |
| Min. 1700 Install Dims | 32"w 22¾"d 19¼"h | |



Flush Cast Iron Design



150 CFM Adjustable Fan Control with Optional Hearth Shelf



Chrome Plated Latch with Wooden Handle



THE BOSTON

Making its debut in the beginning of 2011 the successful Boston series combines a beautiful cast iron exterior with the raw power of an Enviro wood burning firebox. The tested design and build quality of the Boston Fireplace Insert strikes a perfect balance of functionality and aesthetic feel.

Design Features

- Cast Iron Exterior
- Chrome Plated Latch with Wooden Handle
- 1200 or 1700 Firebox
- Limited Lifetime Warranty
- Glass Size: 177 in²
- Optional Oversize Surround
- Choice of Finish
 - Painted Black
 - Antique Chestnut Enamel

Fireplace Details

| Model Designation | 1200 | 1700 |
|------------------------|---------------------------|-----------------------|
| BTU Maximum Input | 67,000 BTU | 74,000 BTU |
| Heating Area | 2,200 ff ² | 3,000 ff ² |
| Efficiency | 82.6% | 84.7% |
| Burn Times | 6-10 Hours | 8-12 Hours |
| Maximum Log Size | 18 in. | 20 in. |
| Min. 1200 Install Dims | 27" w 14" d 19 1/4" h | |
| Min. 1700 Install Dims | 27" w 18 1/2" d 19 1/4" h | |



Chrome Plated Latch with Wooden Handle



150 CFM Adjustable Fan Control



Intricate Cast Iron Detailing



Boston Wood Insert with Antique Chestnut Enamel Finish



Boston Wood Insert Finish Comparison

Exclusive Performance Features of all Enviro Wood Inserts


- large firebox capacity for long overnight burns
- single, easy-to-use air control adjusts the heat output and regulates the fire
- twin pilot injection ports tuned to deliver fast start-up. These injection ports are 3" above the firebox floor so you can build a good deep ember bed and not affect low burn or start up.
- ultra strong air wash helps to keep the glass clean
- high efficiency 150 cfm variable speed fan with override switch for convection heat
- radiant heat is maximized through the large glass area (177 sq. in.)



150 CFM Adjustable Fan Control



Top Corner of the Surround

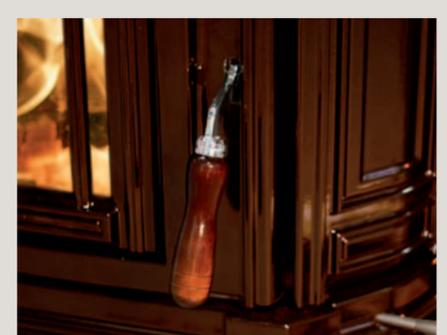

Chrome Plated Latch with Wooden Handle



Venice with Wooden Handle

THE VENICE

The modern design of the Venice fireplace insert lends itself to a wide variety of different room decors. The same reliable heating power of our Kodiak Fireplace Insert with a contemporary twist.

Design Features

- Modern Exterior
- 1200 or 1700 Firebox
- Limited Lifetime Warranty
- Glass Size: 177 in²
- Wooden Handle
- Optional Hearth Shelf (pictured)
- Optional Oversize Surround
- Formed Steel Surround

Fireplace Details

| Model Designation | 1200 | 1700 |
|------------------------|-----------------------|-----------------------|
| BTU Maximum Input | 67,000 BTU | 74,000 BTU |
| Heating Area | 2,200 ff ² | 3,000 ff ² |
| Efficiency | 82.6% | 84.7% |
| Burn Times | 6-10 Hours | 8-12 Hours |
| Maximum Log Size | 18 in. | 20 in. |
| Min. 1200 Install Dims | 27"w 14"d 19¼"h | |
| Min. 1700 Install Dims | 27"w 18½"d 19¼"h | |



Formed Steel Surround



Wooden Handle



Modern Design



THE KODIAK

The Kodiak was our first wood insert fireplace and since that time, has consistently been a popular choice among wood insert customers. Powerful yet simple, the Kodiak lends itself perfectly to cottages and dens alike. Optionally it has five different door configurations, painted, nickel, gold, and painted with nickel or gold trim.

Design Features


- Our Original Wood Insert
- 1200 or 1700 Firebox
- Limited Lifetime Warranty
- Glass Size: 177 in²
- Optional Oversize Surround
- Choice of Door Finish
 - Painted Black
 - Nickel
 - Nickel Trim over Painted Black
 - Gold
 - Gold Trim over Painted Black

Fireplace Details

| Model Designation | 1200 | 1700 |
|------------------------|-----------------------|-----------------------|
| BTU Maximum Input | 67,000 BTU | 74,000 BTU |
| Heating Area | 2,200 ft ² | 3,000 ft ² |
| Efficiency | 82.6% | 84.7% |
| Burn Times | 6-10 Hours | 8-12 Hours |
| Maximum Log Size | 18 in. | 20 in. |
| Min. 1200 Install Dims | 27"w 14"d 19¼"h | |
| Min. 1700 Install Dims | 27"w 18½"d 19¼"h | |



Variety of Door Options

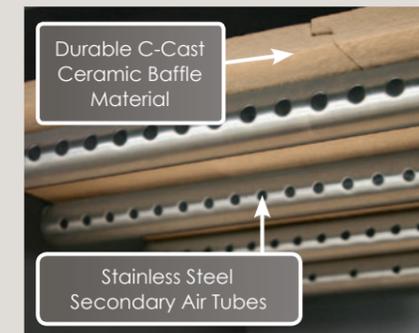

Baffles and Secondary Air Tubes




150 CFM Adjustable Fan Control



Performance

| | The Cabello 1200 | The Cabello 1700 | The Boston 1200 | The Boston 1700 | The Venice 1200 | The Venice 1700 | The Kodiak 1200 | The Kodiak 1700 |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| BTU's* | 67,000 BTU's | 74,000 BTU's |
| Heating Area * | 2200 ft ² | 3000 ft ² |
| Burn Times * | 6-10 hrs | 8-12 hrs |
| Maximum Log Size | 18" | 20" | 18" | 20" | 18" | 20" | 18" | 20" |
| Efficiency* | 82.6% | 84.7% | 82.6% | 84.7% | 82.6% | 84.7% | 82.6% | 84.7% |
| EPA Tested Emissions | 3.3 g per hr. | 4.5 g per hr. | 3.3 g per hr. | 4.5 g per hr. | 3.3 g per hr. | 4.5 g per hr. | 3.3 g per hr. | 4.5 g per hr. |
| Weight | 400 lbs. | 455 lbs. | 425 lbs. | 480 lbs. | 335 lbs. | 390 lbs. | 335 lbs. | 390 lbs. |
| Firebox Capacity | 1.85 ft ³ | 2.50 ft ³ |
| 6" Flue Diameter | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Mobile Home Approved | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 150 CFM Fan | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

| Minimum Clearance to Combustibles | 1200 | 1700 |
|--|---------------|---------------|
| A - side of unit to side wall | 14" | 14" |
| B - top of unit to bottom of 8" mantle | 21" | 24" |
| C - top of unit to max. 3/4" combustible facing | 17 1/2" | 19 1/2" |
| D - side of unit to side facing (3/4 protrusion) | 1" | 1" |
| E - front of door to edge of floor protection | 16" (18" CDN) | 16" (18" CDN) |
| F - side of unit to side facing | 6" (8" CDN) | 6" (8" CDN) |

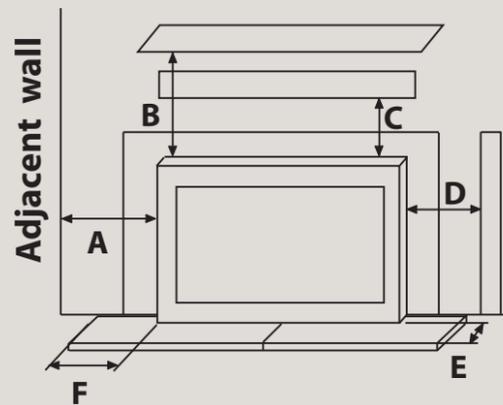

(specs and clearances are approx. only - see technical manual for exact figures)

* Figures will vary considerably with floor plan, house layout and heat loss of house. Due to on-going product development, product appearances and specifications are subject to change without notice. Efficiency and area heated will vary according to location and fuel ** See dealer for details. Certain models may not be available in your area or may require longer lead times for delivery. Approved for sale in Canada and the United States.

Installation Dimensions

| | The Cabello | | The Boston | | The Venice & The Kodiak | |
|--|-------------|----------------|------------|----------------|-------------------------|----------------|
| | Masonry | Zero Clearance | Masonry | Zero Clearance | Masonry | Zero Clearance |
| Firebox Variation | 1200 | 1700 | 1200 | 1700 | 1200 | 1700 |
| Minimum depth | 18" | 22 1/2" | 18 1/2" | 23" | 14 1/2" | 19" |
| Minimum width at back of fireplace | 22 3/8" | 22 3/8" | 23" | 23" | 22 3/8" | 22 3/8" |
| Minimum width at front of fireplace | 32" | 32" | 32 1/4" | 32 1/4" | 27" | 27" |
| Minimum width at front of fireplace to include shroud when surround is in the forward position | N/A | N/A | 32 1/4" | 32 1/4" | 33 3/4" | 33 3/4" |
| Minimum height | 19 1/4" | 19 1/4" | 20" | 20" | 19 1/4" | 19 1/4" |



"Progressive Burn Technology"

Long Burn Times -

Progressive Burn Technology is designed to keep hot embers in the firebox after a nights burning. This process is achieved by restricting the air in the back of the firebox, leaving hot embers for you to start up your insert again.




Clean Burning -

Our secondary air tubes add super-heated air to the fire as the burn progresses to the front. This maintains efficiencies and keeps emissions low.


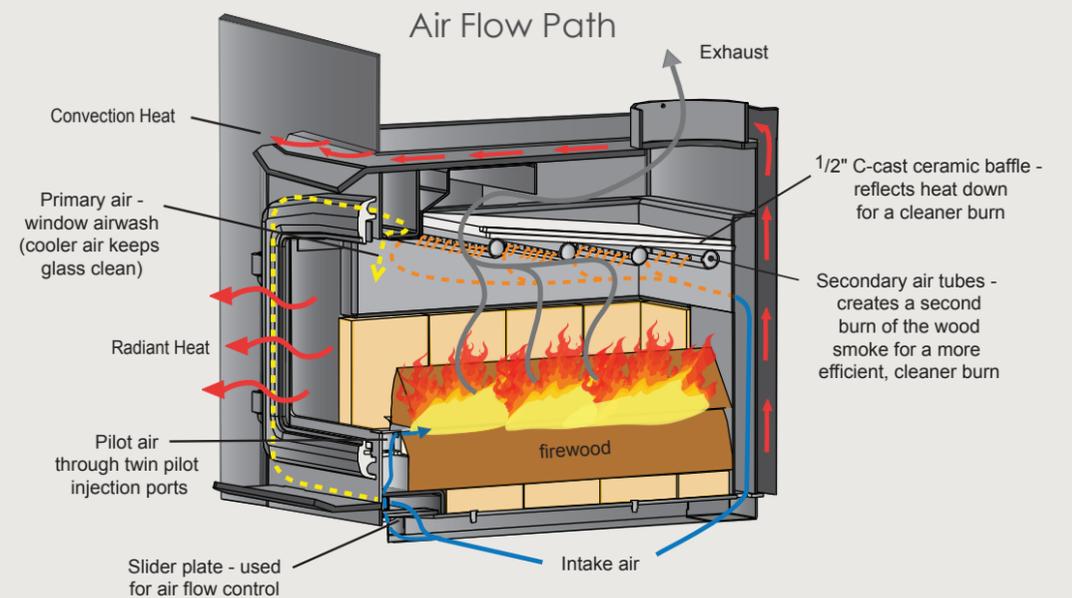
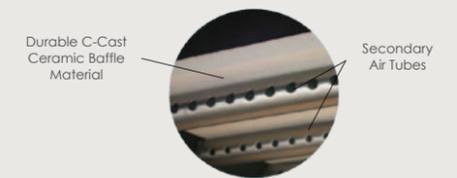


Unit Dimensions




The Cabello
FLUSH-FACE INSERT

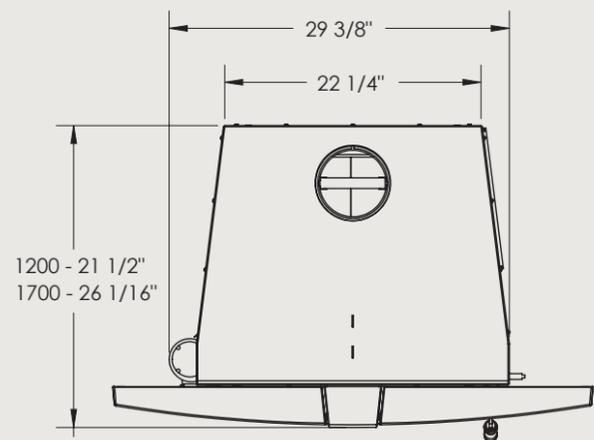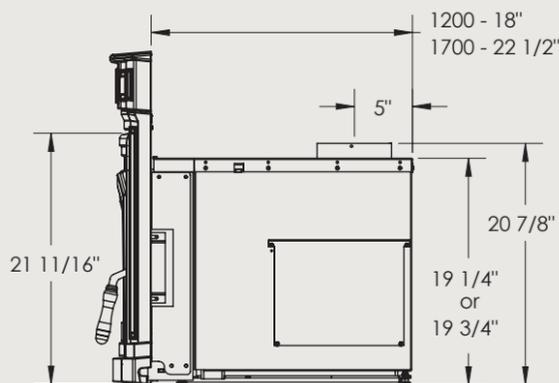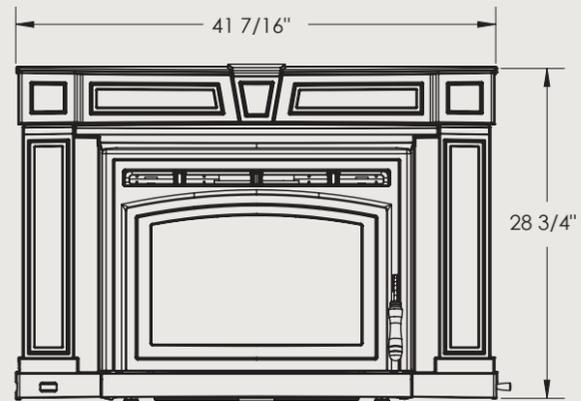




The Boston
TRADITIONAL

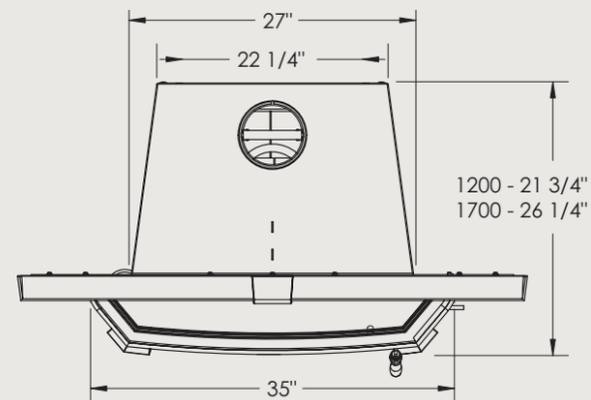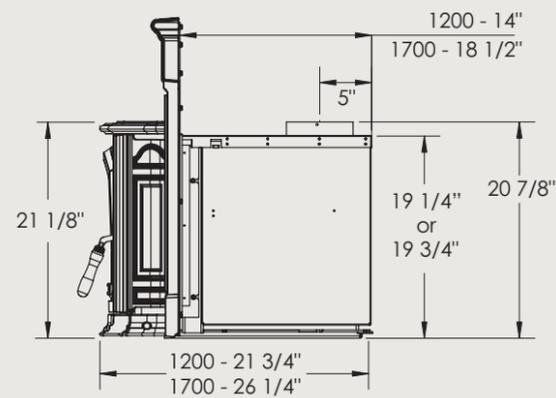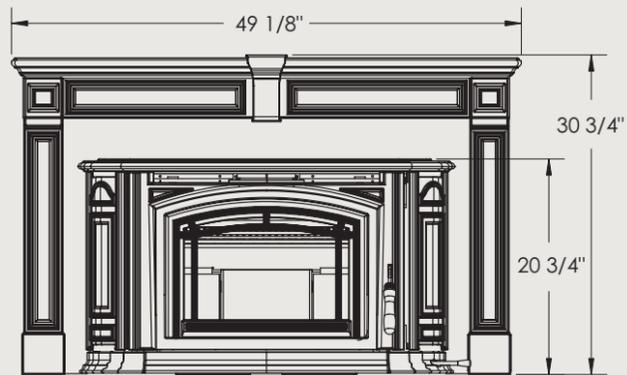

The Venice
MODERN

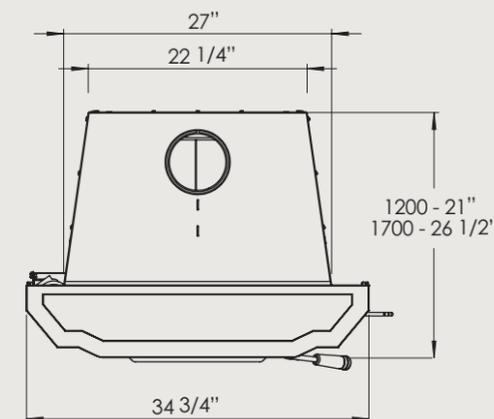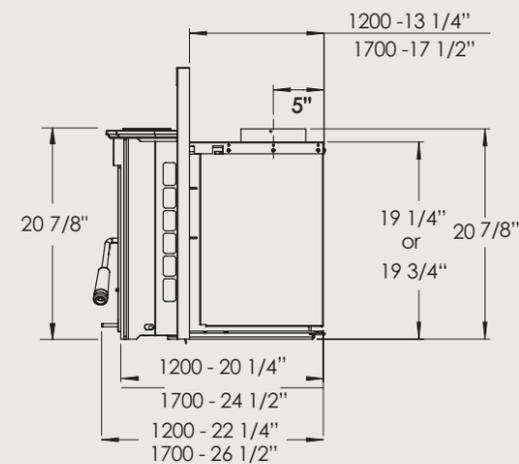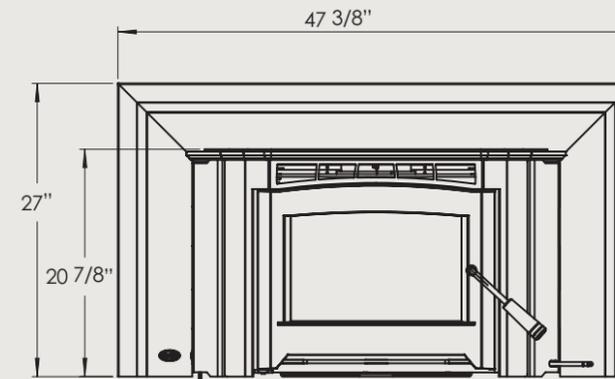

The Kodiak
CLASSIC

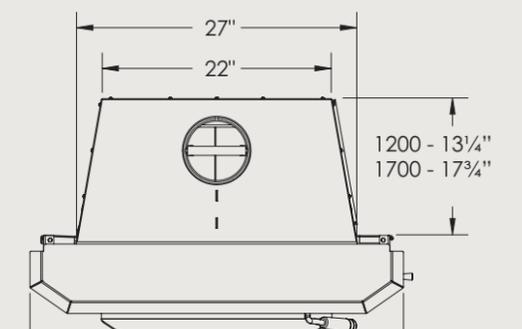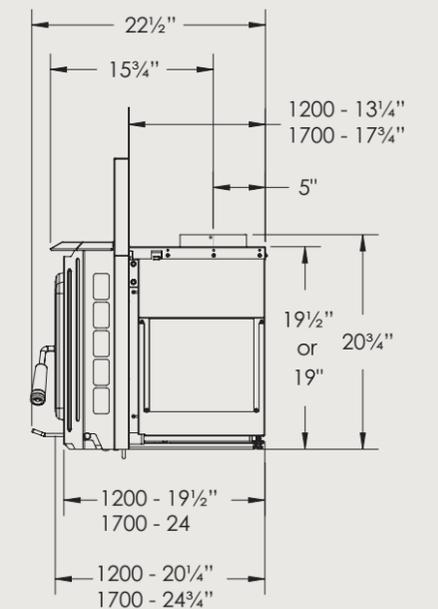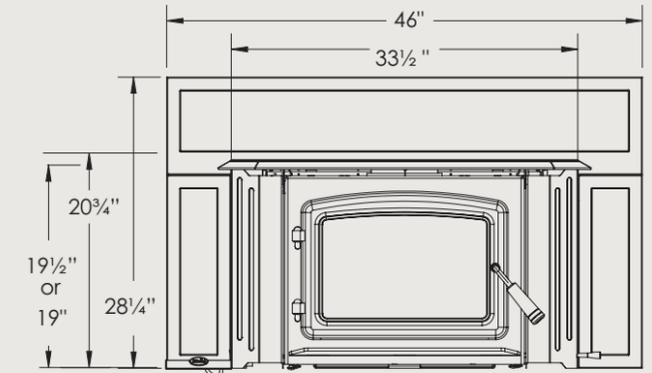

Learn more about
your dream fireplace at

enviro.com

- *Youtube Burn Videos*
- *Detailed Product lineup*
- *Fireplace Photo Galleries*
- *Unit Comparison Charts*
- *Downloadable Manuals*
- *Online Brochures*



Manufactured by Sherwood Industries Ltd • Victoria, BC, Canada
enviro.com • info@enviro.com • Printed in Canada June 2015



Please share and
recycle this brochure