
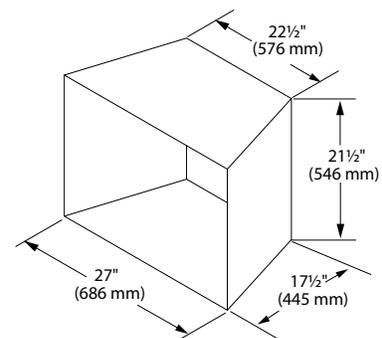
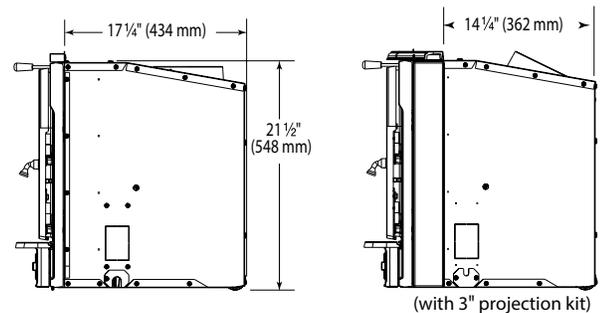
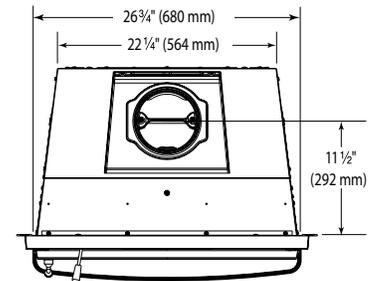


PRODUCT SPECIFICATIONS MONTPELIER WOOD BURNING INSERT

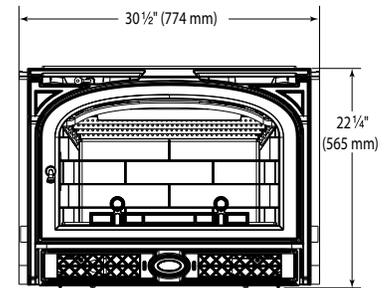

DIMENSIONS

Actual Size: 30½" W x 22¼" H x 17¼" D

Glass Viewing Area: 272 sq. in.

Minimum Fireplace Opening: 27" W x 21½" H x 17½" D x 22½" W (rear)

FEATURES

- Available in Classic Black and Majolica Brown
- Log Length: up to 22"
- Firebox Volume: up to 30 lbs.
- Burn Time: up to 10 hours
- Heating Capacity: up to 1,500 sq. ft.
- 150 cfm twin cylindrical blowers included
- Maximum Heat Output: 40,000 BTUs/hr.
- Efficiency Rating: 75%
- EPA Emissions Rating: 3.0 grams/hr.
- Weight: 335 lbs
- Flue Collar: 6" round

CLEARANCES

- Side trim (1½" max. projection): 21"
- Side trim (projection > 1½")/Side wall: 26½"
- Mantel (12" max. projection): 47½" (flush mount), 44½" (with 3" projection kit)
- Top trim (1½" max. projection): 47½" (flush mount), 36½" (with 3" projection kit)
- Floor protection: extend 8" on either side (44¾" total)
extend 18" from front of insert
16" from front of insert (with 3" projection kit)

FIELD INSTALLED ACCESSORIES

- Six surround options (2 steel, 4 cast iron)
- 3" projection kit (M3PKCB)
- Trim kit base riser in 3 sizes, Classic Black

A Brand of Vermont Castings Group
149 Cleveland Drive
Paris, Kentucky 40361
www.vermontcastings.com



Warning: Hot glass will cause burns. Do not touch glass until cooled. Never allow children to touch glass.

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2014 Vermont Castings Group 0614 v2